

SupaNylon® MELT BLOWN FILTER

Melt-blown 100% nylon filters ideal for high temperature applications as well as solvents, hydrocarbons, and aromatics inks, coatings, water, etc.

SupaNylon® MELT BLOWN FILTER


100% NYLON FILTERS IDEAL FOR HIGH TEMPERATURE APPLICATIONS PIGMENT-BASED INKS, CERAMIC INKS, AND DISPERSE INK JET INKS

SupaNylon® Melt Blown Filters are made of 100% nylon melt-blown depth media without surfactants, binders, or adhesives. Melt-blown depth media consists of gradient pores. The cartridge is capable of efficiently capturing particles of different sizes with a great flow rate and lifetime. These cartridges have been designed for applications where polypropylene filters cannot be used.

Cobetter SupaNylon filters are suitable for high temperature applications as well as applications involving solvents, hydrocarbons, and aromatics.



FEATURE	BENEFIT
Melt-blown 100% nylon media with gradient pores	Provides high contaminant hold capacity and high removal efficiency at low pressure drop
	Long service life, high flow rate due to the different linear diameters and unique interwoven density control process. SupaNylon has a porosity far beyond that of similar products, which results in lower pressure loss across the cartridge and higher contaminant-holding capacity.
	Stable pore structure and high-purity filtration. Manufactured with no wetting agents, solvents, surfactants, binders, or adhesives.
	Wide range of filtration rates from 0.5 µm to 40 µm to meet various operation conditions.
Quality Assurance	Manufactured in a facility which adheres to ISO 9001 Practices.
Particle shedding	Autoclaved filter effluent meets the requirements in USP <788> for large volume parenterals.
Cleanliness	Food Contact Declaration 2008/39/EC (2002/72/EC)
Non-fiber release	Component materials meet the criteria for a "Non-fiber-releasing filter" as defined in 21 CFR210.3 (b) (6).

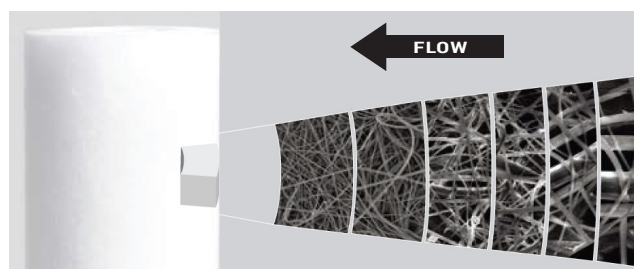


Typical Applications

- Pure Water Prefiltration
- Slops Reprocessing
- Final Product Dehazing
- Liquified Petroleum Gas
- Adhesives
- Electrophoretic Paint and Varnishes
- Sour Water Stripper Protection
- Polymers
- Degreasing Agents
- Inks
- Solvents
- Hydrocarbons
- Aromatics

SPECIFICATIONS

Filter media	100% Nylon
End Caps and Adapters	100% Nylon
O-rings	Silicone, EPDM, FKM, FEP/PFA encapsulated FKM
Diameter	O.D.: 2.48" (63 mm) (MB-NY/MB-NYC) 2.52" (64 mm) (64RMF-NY) I.D.: 1.10" (28 mm) (MB-NY/MB-NYC) 1.18" (30 mm) (64RMF-NY)
Max. operating temperature	120°C
Max. differential pressure	0.42 MPa (4.2 bar, 61 psi) at 20°C 0.12 MPa (1.2 bar, 17 psi) at 120°C

FLOW RATES

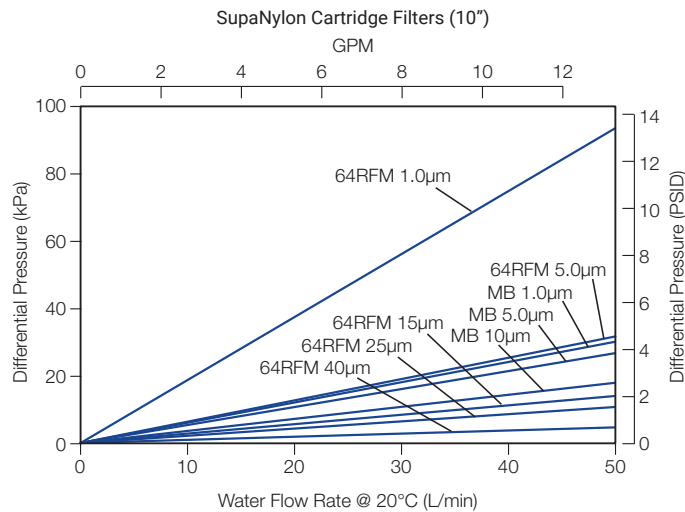

ORDERING INFORMATION

EXAMPLE: **MB-NYC0100NR10NC** = Nylon core, 1.0 µm, no endcap/gasket, 10" length filter, no seals, Chemical/Industrial industries



Type

MB-NY = No Core
MB-NYC = With Nylon Core
64RMF-NY = With Nylon Core, Rolled Structure



Removal Rating

0050 = 0.5 µm
0100 = 1.0 µm
0300 = 3.0 µm
0500 = 5.0 µm
1000 = 10 µm
1500 = 15 µm
2000 = 20 µm



Connection

DOE = Double Open End, (No Gaskets)
TC = 222 O-ring/Flat
TF = 222 O-ring/Fin
SC = 226 O-ring/Flat
SF = 226 O-ring/Fin
NR = No Endcap or Gasket



Nominal Length

05 = 5"
10 = 10"
20 = 20"
30 = 30"
40 = 40"
50 = 50"



Seal Material

S = Silicone
E = EPDM
V = FKM
P = E-FKM (FEP/PFA encapsulated FKM)
N = No Gasket/Seal



Industry

C = Chemical/Industrial



BANNER INDUSTRIES IS THE EXCLUSIVE DISTRIBUTOR FOR COBETTER PRODUCTS IN THE USA
Visit www.bannerindustries.com and select the Contact Us link to find the location nearest you. The Banner Industries of N.E., Inc. Terms and Conditions of Sale apply and are fully and expressly incorporated herein by reference and constitute a part of any contract for the purchase of the products described herein.

www.bannerindustries.com | Technical Sales: filtration@bannerindustries.com

CBBPP1186 Rev. 11172020
Copyright © 2020 Banner Industries, Inc. All rights reserved.
SupaNylon® is a registered trademark of Cobetter Filtration Equipment Co., Ltd.