

IMMERSION COILS

Reactor Coil Model R500

Niche Reactor Coil Heat Exchangers—made with tubing of fluoropolymer fluorocarbon resin—are used for heating and cooling of corrosive fluids in a wide range of processes and applications. The well-known non-stick characteristics of fluoropolymer resist corrosion and reduce fouling. Niche Reactor Coils are designed for immersion directly into the process vessel, and are most efficient when agitated in the process solution. During agitation, the flexing action of the coils helps reduce fouling and dislodges deposits that may have formed. This and other unique design features make the Model R500 Reactor Coil ideal for crystallizer applications.




Specifications

Description	Spec
Tubing Configuration	Loose Bundle
Tube Outside Diameter	.125 inch (3.175 mm)
Tube Wall Thickness	.0125 inch (.3175 mm)
Length Tolerance	Standard: -0, +5.0 inch (-0, +127 mm) Close: ±0.5 inch (±12.7 mm)
Average Heat Transfer Coefficient U	40-50 BTU/Hr/ft ² /°F (227-284 watts/m ² -°K)


Model Number

EXAMPLE: R 500 S M C - 4 - 12		
R	REACTOR COIL	
500	MODEL NUMBER	
S	END CONNECTIONS	B = None (bundle only)
		S = Stainless steel
		T = TEFLON®
		W = Through the wall stainless steel
M	LENGTH (ft.)	
C	GENERATION	
4	TOLERANCE	C = Close
		(Blank) = Standard
12	END THREADS	M = Metric
		(Blank) = NPT


Operation Limits

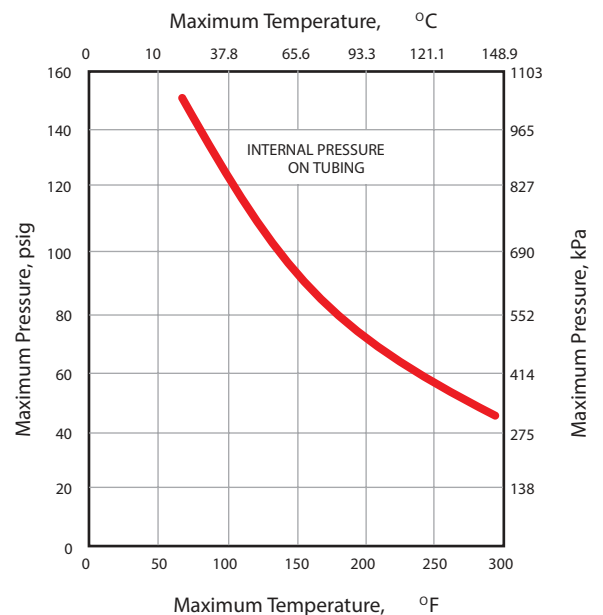


Dimensions - Model R500S, SC, SMC

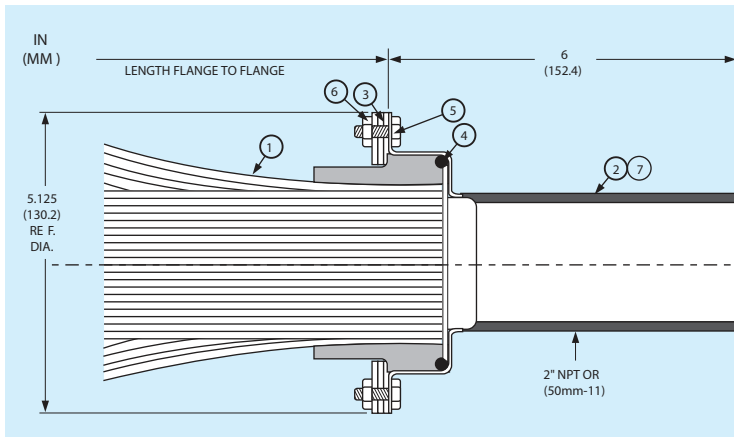

REF NO.	PART NO.	DESCRIPTION	QTY.
1	13D5257	BUNDLE	1
2	13A706-3	END CAP—316 SS	2
3	13A1005-1	SPLIT RING—316 SS	2
4	2-339	O-RING—EPR	2
5	1/4-20x5/8	HEX HEAD BOLT—316 SS	16
6	1/4-20	HEX NUT—304 SS	16
7	13D6204-3	END CAP—316 SS	2

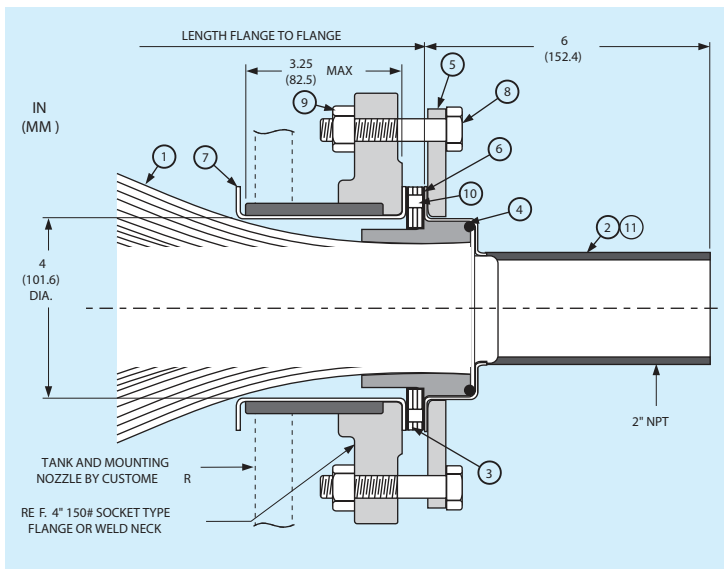

REF NO.	PART NO.	DESCRIPTION	QTY.
1	13D5257	BUNDLE	1
2	13A706-3	END CAP—316 SS	2
3	13A1005-1	SPLIT RING—316 SS	2
4	2-339	O-RING—EPR	2
5	13A934	HOLD DOWN RING—C.S.	2
6	13A1003	COLLAR—VITON®	2
7	13A1006	SLEEVE—FLUOROPOLYMER	2
8	1/2-13x2 3/4	HEX HEAD BOLT—316 SS	16
9	1/2-13	HEX NUT—316 SS	16
10	13A6226	BUTTON	16
11	13D6204-3	END CAP—316 SS	2

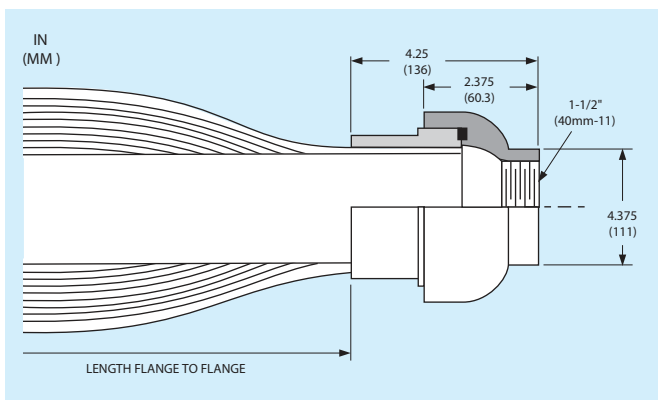

Heat Transfer Area

LENGTH	AREA		
	FT	FT ²	M ²
4		49.1	4.6
6		81.8	7.6
8		114.5	10.6
10		147.2	13.7
12		179.9	16.7
14		212.0	19.8
16		245.3	22.8

Niche
FLUOROPOLYMER PRODUCTS

42 MOUNTAIN AVENUE
NESQUEHONING, PENNSYLVANIA, 18240-2201 U.S.A.
TEL: +1 570-645-6917 • 800-441-7777 (U.S. and Canada only)
FAX: +1 570-645-6950
www.nichefpp.com
E-mail: info@nichefpp.com

© 2021 Niche Fluoropolymer Products. All rights reserved.
1M1117P (040022)

Fluoropolymer resins are generally considered inert to most chemicals. Under certain conditions of pressure and temperature, or combinations of chemicals, fluoropolymer tubing should not be used. Please contact Niche for discussion of your specific process to be certain that our products are appropriate for your intended use.

Adequate ventilation should be used where fluoropolymers are heated during tube repairs. Flu-like symptoms occur from exposure to vapors evolved from fluoropolymers at very high temperatures, up to 800F or from smoking materials that contain particles of fluoropolymers. Symptoms pass within 48 hours and are only adverse effects observed in humans to date. Unheated fluoropolymers are essentially inert and are nonirritating to the skin.

This information set forth herein is furnished free of charge and is based on technical data which Niche believes to be reliable. It is intended for use by persons having technical skill and at their own discretion and risk. Since conditions of use are outside our control, we make no warranties, express or implied, and assume no liability in connection with your use of this information. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.